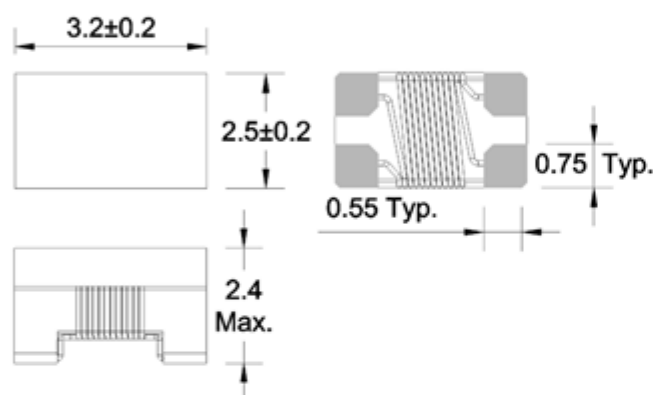
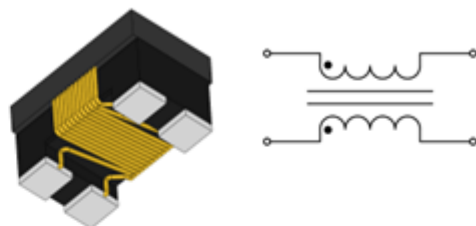
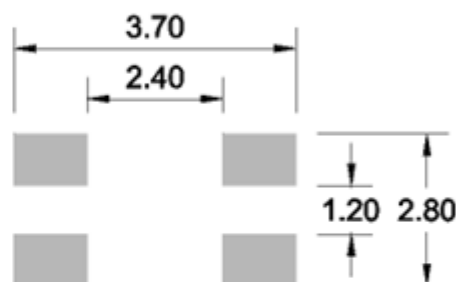


**CMFS3225-SERIES****Applications**

- DC/DC Converter
- Power supply systems
- Various electronic devices
- DC low voltage power lines
- Multimedia devices
- Safety applications, etc.

Environmental data

- Operating temperature range : -40°C ~ +125°C(component)
- Storage conditions (packaged) : -25°C ~ +40°C, ≤75% RH
- Complies with AEC-Q200 standard

Dimensions [Unit : mm]**Picture****Land Pattern [Unit : mm]****Specifications**

Part No.	Common mode impedance(Ω) 10MHz		Inductance (uH) [100KHz, 1V]	DCR (mΩ)	Heating Rating Current DC(A) a)	Insulation resistance (MΩ)	Rated voltage (Vdc)
	MIN.	TYP.	+50%, -30%	MAX.	MAX.	MIN.	MAX.
CMFS3225-110	300	505	11	400	0.3	10	50
CMFS3225-220	500	950	22	500	0.25	10	50
CMFS3225-510	1,000	2,200	51	700	0.2	10	50
CMFS3225-101	2,200	4,900	100	1,500	0.15	10	50

Notes

* All test data is referenced to 25 °C ambient

a) DC current (A) that will cause an approximate ΔT of 40 °C



CMFS3225-SERIES

■ Performance Graph

— Differential Mode
— Common Mode

